

Main characteristics

- Optimised mechanical structure
- Strokes from 50 to 2500 mm
- Fast installation by mean of steel brackets
- Sliding or floating magnetic cursor
- Synchronous Serial Interface direct to controllers
- Output data resolution available from 20 to 40 μm
- Data format: binary or Gray code; incremental/ decremental
- Power supply 10...32 Vdc
- Resistance to vibration (DIN IEC68T2/6 12g)
- IP67 protection
- Work temperature: -30...+90°C
- Electromagnetic compatibility EMC 2014/30/EU
- Compliant to the directive RoHS 2011/65/EU

Contactless linear position transducer with HYPERWAVE magnetostrictive technology, with RS422-SSI digital output interface.

The absence of electrical contact on the cursor eliminates all wear and guarantees almost unlimited life.

High performance in terms of environmental IP protection and EMC immunity.

High accuracy of the measurement with reference to the non linearity, repeatability and hysteresis. High resistance to vibrations, mechanical shocks for use in a harsh industrial environment.

TECHNICAL DATA

Model	from 50 to 2500 mm
Measurement taken	displacement
Position read sampling time (typical)	1 ms
Shock test DIN IEC68T2-27	100g - 11ms - single shock
Vibrazioni DIN IEC68T2-6	12g / 10...2000Hz
Velocità di spostamento	≤ 10 m/s
Max. acceleration	≤ 100 m/s ² displacement
Output data resolution available	20, 40 μm
Cursor (see note)	Sliding cursor Floating separate cursor
Working temperature	-30...+90°C
Storage temperature	-40...+100°C
Coefficient of temperature	20 ppm FS / °C
Protection	IP67


Note 1) For stroke > 2500mm use sliding or floating cursors with max. distance of 4mm

ELECTRICAL DATA






Output signal	Synchronous Serial (SSI); Binary/Gray; Incremental/Decremental
Data length	24 - 25 bit
Nominal power supply	10...32 Vdc
Max. power ripple	1Vpp
Max. input	50mA
Output load	RS422/485 standard
Electrical isolation	500V (*) (D.C. supply/earth)
Protection against polarity inversion	Yes
Protection against overvoltage	Yes
Self-resetting internal fuse	Yes

(*) it includes a 50V 2J voltage suppressor

MECHANICAL DIMENSIONS

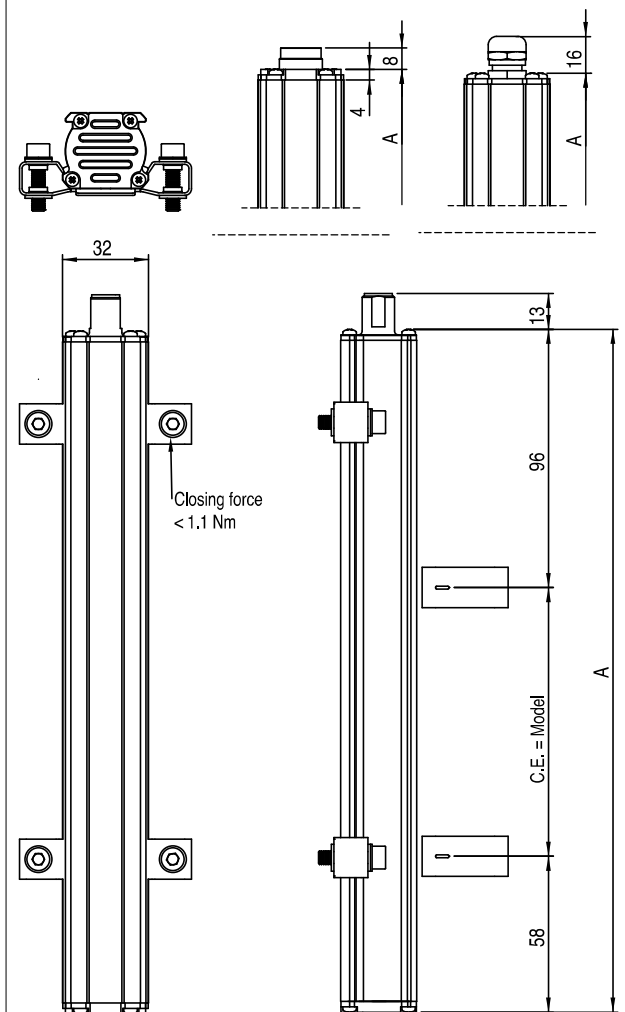


ELECTRICAL / MECHANICAL DATA																																
Model		50	75	100	130	150	175	200	225	300	250	350	360	400	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200	1250	1300	1400	1500
																								1750	2000	2250	2500					
Electrical stroke (E.S.)	mm	Model																														
Independent linearity	± %F.S.	Typical : ≤ ± 0,02 %FS (min ± 0,060 mm) with sliding cursor Typical : ≤ ± 0.02% FS with floating cursor (value depending on the distance between the cursor and the sensor body)																														
Max. dimensions (A)	mm	Model + 154 mm																														
Repeatability	mm	< 0,02 (limited by the resolution of the output value)																														
Hysteresis		< ± 0,005% FS (min 0,010 mm)																														
Sampling time	ms	1 (for stroke from 1000) 2 (for stroke from 1100 to 2000) 4 (for stroke >2000)																														

ELECTRICAL CONNECTIONS				
OUTPUT WPP-S-B	OUTPUT WPP-S-C	OUTPUT WPP-S-D	OUTPUT WPP-S-H	OUTPUT WPP-S-F/R
				


Function	WPP-S-B	WPP-S-C	WPP-S-D	WPP-S-H	WPP-S-F	WPP-S-R	CAV00X
	6-pin M16	8-pin M16	7-pin M16	8-pin M12	Cable output	PUR cable output	Optional 8-pin cable
Data -	1	5	1	5	Orange	Pink	Green
Data +	2	2	2	2	Orange / White	Blue	Gray
Clock +	3	1	3	3	Green / White	Gray	Pink
Clock -	4	3	4	1	Green	Yellow	Yellow
Power supply +	5	7	5	7	Blue / White	Green	Brown
Power supply GND	6	6	6	6	Blue	Brown	Blue
n.c.	-	8	7	8	-	-	White
n.c.	-	4	-	4	-	-	Red

The transducer case must be grounded with the cable sheathing on the control system side only.


BRACKETS ON REQUEST



Brackets (2 brackets for every kit)	
Steel brackets, interaxis 42.5mm	090
Steel brackets, interaxis 50mm	091



Brackets code	Interaxis (i)	Screw (V)	Dimension (A)
PKIT090	42.5	M4	56
PKIT091	50	M5	63.5

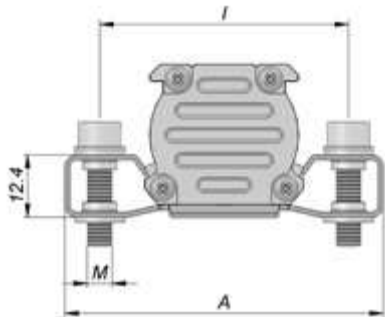

OPTIONAL CONNECTORS

For output H, M12 connector thread
Codes: **CON035** for 8-pin output (WPP-S-H)
CON042 for 8-pin output (WPP-S-H)

For outputs B-C-D, M16 connector thread
Codes: **CON021** for 6-pin output (WPP-S-B)
CON022 for 6-pin output (WPP-S-B)
CON023 for 6-pin output (WPP-S-B)
CON026 for 7/8-pin output (WPP-S-C/D)
CON027 for 7/8-pin output (WPP-S-C/D)
CON028 for 7/8-pin output (WPP-S-C/D)

Connector extraction length 10 mm


<p>CON035 IP67 - IEC 48B</p>	<p>CON042 IP67</p>	<p>CON021 CON026 IP40 - EMC</p>	<p>CON022 CON027 IP67 - EMC</p>	<p>CON023 CON028 IP67 - EMC</p>
---	-------------------------------	---	---	---

Note: 1. The IP rating specified in this document normally applies with the suitable female connector plugged-in and properly wired..


OPTIONAL CABLES OUTPUT H

8-pin cable code		WPP-S-H	
Length "L"		CODE	
		Straight cable	90° cable
2	mt	CAV002	CAV005
5	mt	CAV003	CAV006
10	mt	CAV004	CAV007
15	mt	CAV009	CAV008

PREWIRED CABLE WITH STRAIGHT CONNECTOR

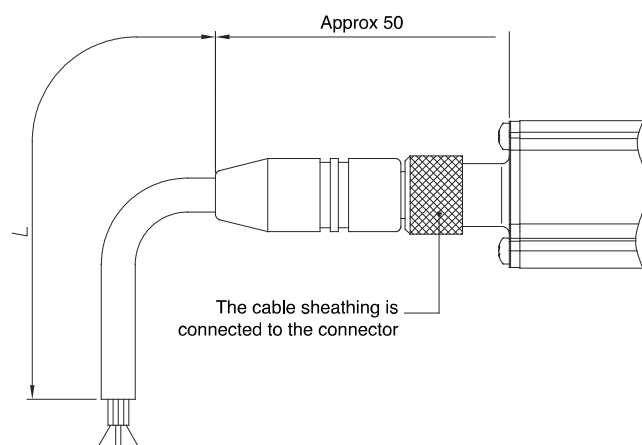

PREWIRED CABLE WITH 90° CONNECTOR

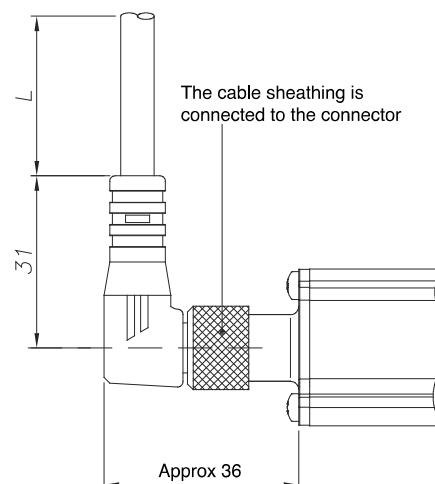

Electrical installation requirements and Conformity certificate are available on our web site: www.gefran.com

GEFRAN spa reserves the right to make aesthetic or functional changes at any time and without notice