

The TS3 simulates the output of a Gefran mV/V melt pressure transducer (M3 and W3 series) at various pressure levels.

The TS3 simulates any strain gage-based transducer and is available in either a 6-pin (TS36) or 8-pin (TS38) version.


MAIN FEATURES

- Better than $\pm 0.25\%$ FSO accuracy (± 0.05 mV/V)
- Economically priced
- Lightweight, easy-to-use
- Internal bridge resistance of 350Ω
- Internal 80% FSO R-Cal standard
- Optional certification available GTP (advanced protection)


TECHNICAL SPECIFICATIONS

Accuracy	$\pm 0.25\%$ FSO
Simulator Bridge	350Ω (nominal)
Internal R-Cal	80% FSO (2.66 ± 0.01 mV/V)
Output Levels	0% FSO ± 0.005 mV/V 20% FSO ± 0.005 mV/V 40% FSO ± 0.005 mV/V 60% FSO ± 0.005 mV/V 80% FSO ± 0.005 mV/V 100% FSO ± 0.005 mV/V
Input Voltage	6-12 VDC (10 VDC recommended)
Electrical Connection	PT07A-10-6P (6-pin) PT07A-12-8P (8-pin)

MECHANICAL DIMENSIONS

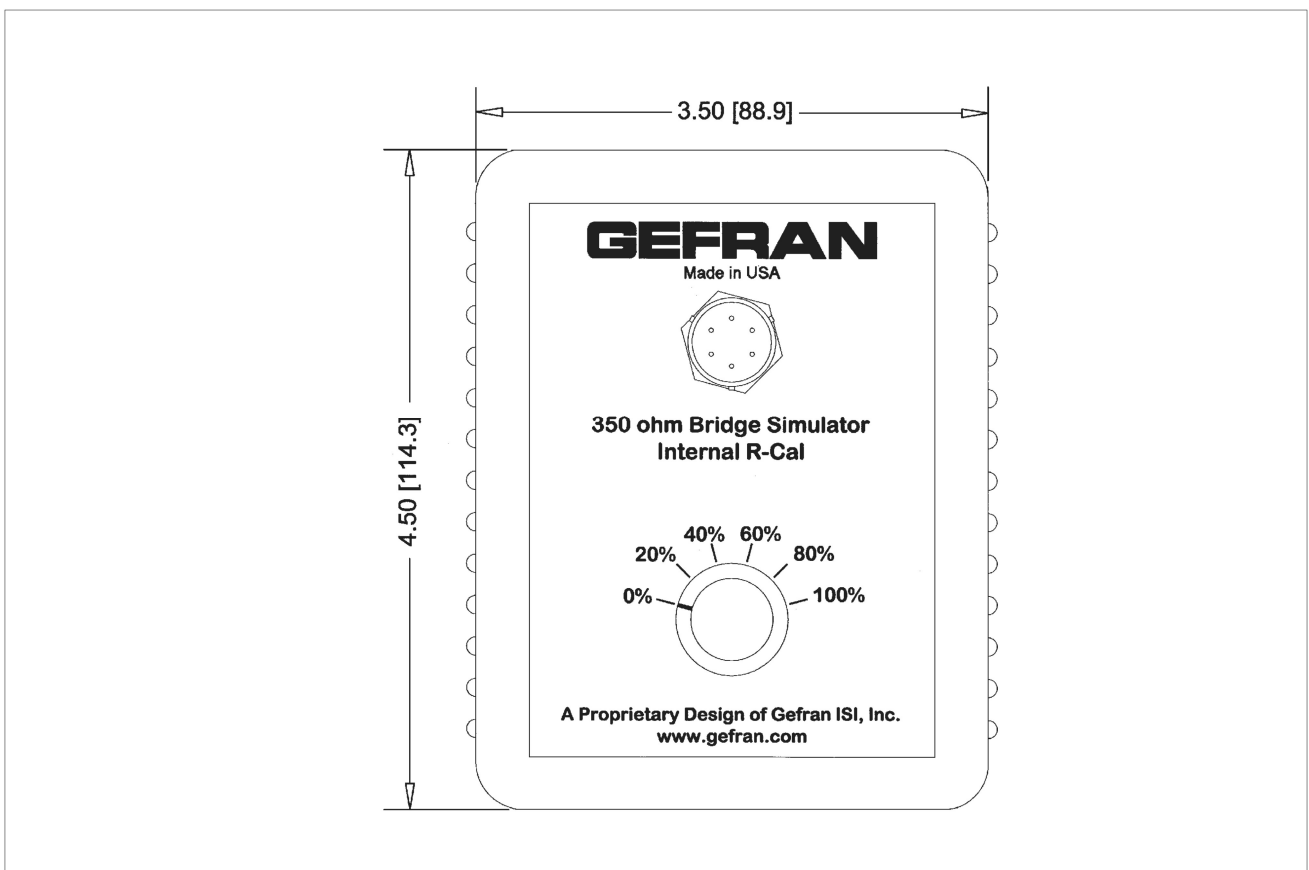

ORDER CODE

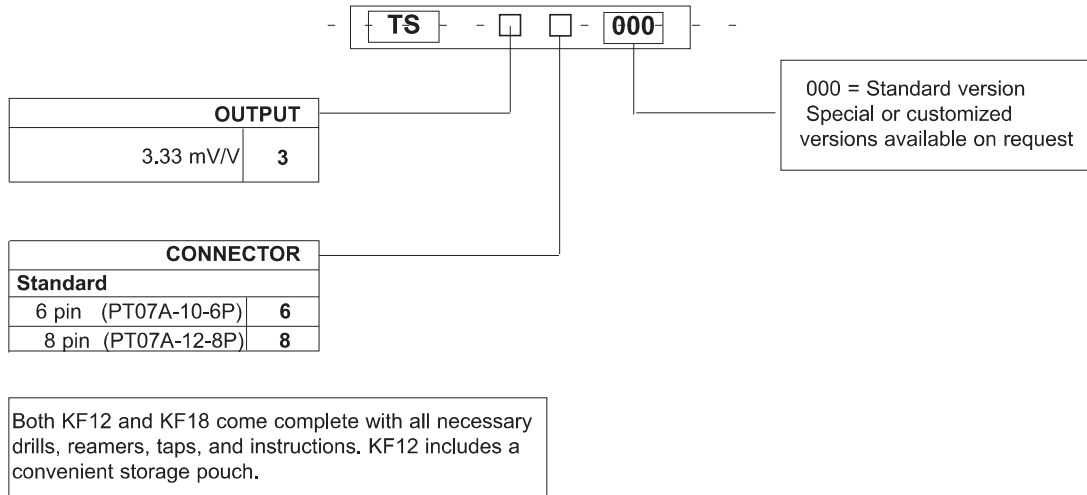

GEFRAN reserves the right to make any kind of design or functional modification at any moment without prior notice.

GEFRAN

GEFRAN spa
via Sebina, 74
25050 PROVAGLIO D'ISEO (BS) - ITALIA
tel. 0309888.1 - fax. 0309839063
Internet: <http://www.gefran.com>

cod. TS3 - 12/05